


Model X  
EVSE-EV Charger  
Private/Semi-Public Use



Wall Mounted



Easy Installation



Status Screen



WiFi / RFID



White & Black



# User Interface

<b>Connectivity</b>	WiFi / RFID.
<b>User Identification</b>	HNE Software App.
<b>User Interface</b>	HNE Application.
<b>Information Display</b>	HNE Application, and OLED Screen.
<b>Color</b>	White / Black

# Technical Datasheet


## General Specifications

Model	Charging Mode	Dimensions	Weight	Standards
X	Mode 3	285x175x99mm	1.5 kg	IEC 61851-1 ICE 61851-22

## Electrical Specifications

<b>Charging Power</b>	7.4 kW	11 kW	22 kW
<b>Rated Voltage</b>	220-240 V	380-400 V	380-400 V
<b>Rated Current</b>	32 A (1Ph)	16 A (3Ph)	32 A (3Ph)
<b>Rated Frequency</b>	50/60 Hz	50/60 Hz	50/60 Hz
<b>GFCI</b>	20 mA	-	-
<b>Connector Type</b>	Type 2 Socket		
<b>Protection Rating</b>	IP 54		
<b>RCD</b>	External RCD Required		

## Dimensions

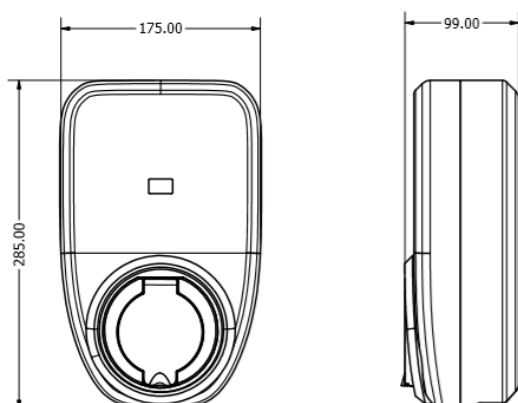

## Part Number

Model	Code	Rated Power
X	1	7.4 kW
X	2	11 kW
X	3	22 kW