


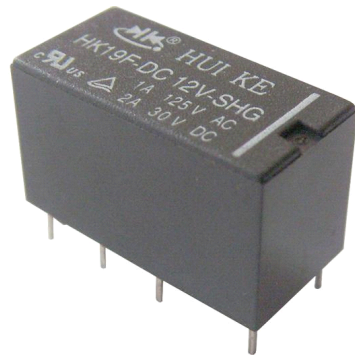

Features

- 2 Form C configuration
- High switching capacity: 125VA/60W
- Bifurcated contacts
- Epoxy sealed for automatic-wave soldering and cleaning
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.2 x 10.0 x 12.0) mm

CONTACT DATA

Contact Form	2C
Contact Material	Silver Alloy
Contact Ratings	1A 125VAC /2A 30VDC
Max Switching Voltage	250VAC/125VDC
Max Switching Current	2A
Max Switching Power	125VA /60W
Contact Resistance	100MΩ(at 1A 6VDC)
Electrical Life	1X10 ⁵ Ops(30Ops/min)
Mechanical Life	1X10 ⁷ Ops(300Ops/min)

GENERAL DATA


Insulation Resistance		100MΩ 500VDC
Dielectric Strength	Between coil & contacts	1000VAC 1min
	Between open contacts	600VAC 1min
Operate Time		Max. 6ms
Release Time		Max. 4ms
Temperature Range		- 30°C to +70°C
Shock Resistance	Functional	98m/s ² (10g)
	Destructive	980m/s ² (100g)
Vibration Resistance		10 to 55Hz 1.5mm
Humidity		40% to 85% RH
Weight		Approx. 5g
Safety Standard		CUL TÜV

COIL DATA


Nominal Voltage (VDC)	Coil Resistance at 20°C ± 10%(Ω)				Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicate Voltage (VDC)
	0.15W	0.20W	0.36W	0.45W			
3	60	45	25	20	2.25	0.30	3.90
5	167	125	70	56	3.75	0.50	6.50
6	240	180	100	80	4.50	0.60	7.80
9	540	405	225	180	6.75	0.90	11.70
12	960	720	400	320	9.00	1.20	15.60
24		2880	1600	1280	18.00	2.40	31.20

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

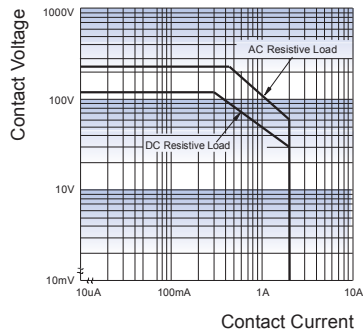

ENDURANCE CURVE

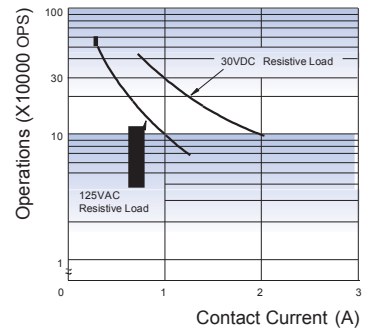

Notice

- 1) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 2) The relay may be damaged because of falling ot when shocking conditions exceed the requirement.
- 3) Regarding the plastic sealed relay, we should leave it cooling naturally untill below 40 C after welding, then clean it and deal with coating remarkably the temperature of solvents should also be controlled below 40 C. Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 4) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidetines of relay".

Disclaimer

This datasheet is for the customers' reference. All the specifications ate subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a tight position choose the suitable product fot their own application. If thete is any query, please contact Everway for the technical service. However it is the user's responsibility to determine which product should be used only.