

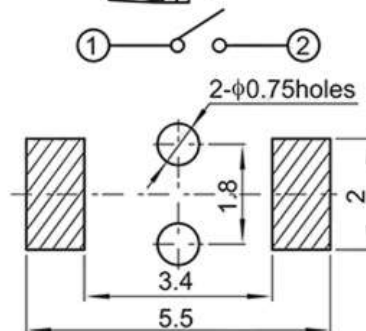



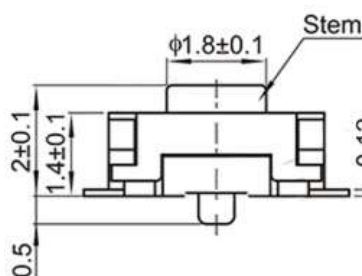

TS-3506

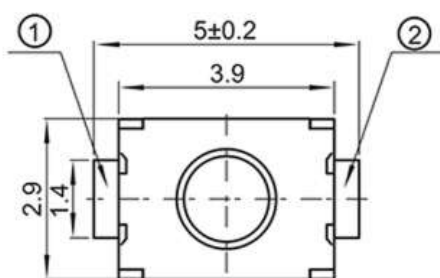

| Pin Number | Signal Name |
|------------|-------------|
| 1          | VBUS        |
| 2          | D-          |
| 3          | D+          |
| 4          | GND         |
| 5          | SSRX-       |
| 6          | SSRX+       |
| 7          | GND         |
| 8          | SSTX-       |
| 9          | SSTX+       |
| Shell      | Shield      |

|                                      |              |         |                                                                                       |         |       |       |      |
|--------------------------------------|--------------|---------|---------------------------------------------------------------------------------------|---------|-------|-------|------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |              |         | WIRE 乐清市维诺尔电子科技有限公司<br>YUEQING WEINUOER ELECTRONIC TECHNOLOGY CO., LTD.               |         |       |       |      |
| XXX ±0.10                            | JX ±0.20     | X ±0.30 | JX ±3°                                                                                | JX ±2°  |       |       |      |
| APPROVED                             |              |         | PART NAME:                                                                            | 轻触开关    |       |       |      |
| CHECKED                              |              |         | PART No:                                                                              | TS-3506 |       | C     |      |
| DRAWN                                | pengchaoyang |         | PROJECTION:                                                                           | UNIT:   | SCALE | SHEET | REV. |
| DATE                                 | 2014.10.24   |         |  | mm      | 1:1   | 10F1  | A    |