




ZL39603(5195)连接器 ZL39603(5195)Connetor


间距 (pitch) : 3.96mm

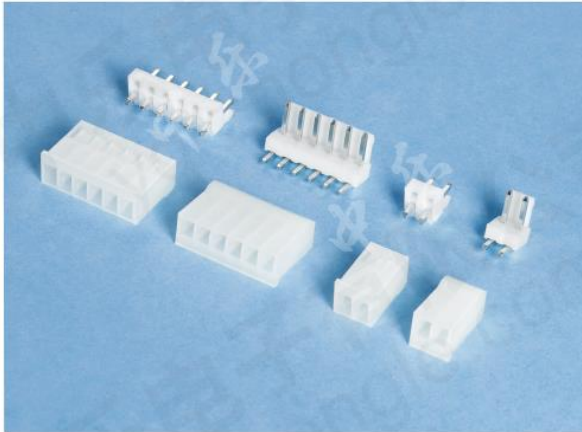


技术参数SPECIFICATIONS

- ◆极数 (Poles) : 2~16
- ◆适用线规 (Applicable wires): AWG24#~18#
- ◆额定电压 (Voltage rating): 250V.AC/DC
- ◆额定电流 (Current rating): 5A
- ◆接触电阻 (Contact resistance): $\leq 0.015\Omega$
- ◆绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- ◆耐压 (Withstand voltage): 1500V.AC/1分钟 (Minute)
- ◆温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆材料 (Material):
 - 孔座 (Housing): 尼龙 (Nylon) UL94V-2(0)
 - 端子 (Terminal): 磷青铜 (Phosphor.Bronze Tin/plated)
 - 针座 (Wafer): 尼龙 (Nylon) UL94V-0
 - Pin针 (Pin): Phosphor.Bronze Tin/plated


ZL39603-Y(5195)

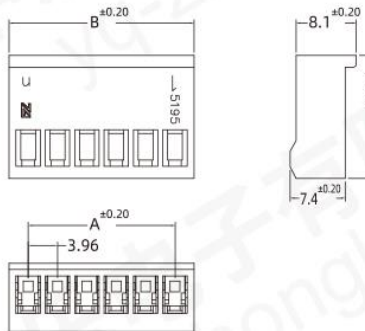


ZL39603-PT(5195)

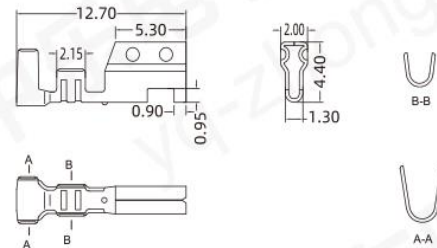


ZL39602-A(3.96)

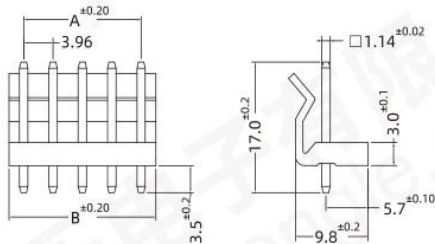

ZL39602-AWG(3.96)

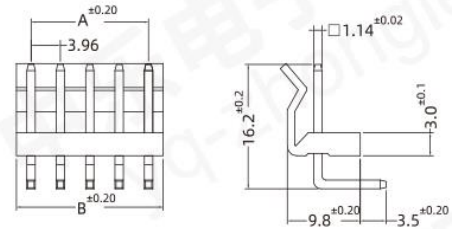

ZL39602-AW(3.96)

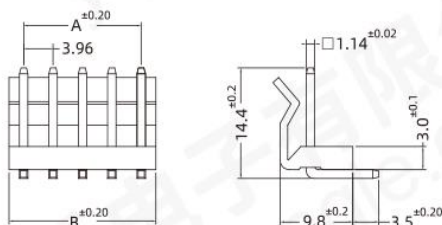

线数 Poles	型号 Type	尺寸 Dimensions (mm)		线数 Poles	型号 Type		尺寸 Dimensions (mm)	
		A	B		立式 A(180°)	卧式 AW(90°)	A	B
2	ZL39603-2Y	3.96	9.12	2	ZL39602-2A	ZL39602-2AW	3.96	7.92
3	ZL39603-3Y	7.92	13.08	3	ZL39602-3A	ZL39602-3AW	7.92	11.88
4	ZL39603-4Y	11.88	17.04	4	ZL39602-4A	ZL39602-4AW	11.88	15.84
5	ZL39603-5Y	15.84	21.00	5	ZL39602-5A	ZL39602-5AW	15.84	19.80
6	ZL39603-6Y	19.80	24.96	6	ZL39602-6A	ZL39602-6AW	19.80	23.76
7	ZL39603-7Y	23.76	28.92	7	ZL39602-7A	ZL39602-7AW	23.76	27.72
8	ZL39603-8Y	27.72	32.88	8	ZL39602-8A	ZL39602-8AW	27.72	31.68
9	ZL39603-9Y	31.68	36.84	9	ZL39602-9A	ZL39602-9AW	31.68	35.64
10	ZL39603-10Y	35.64	40.80	10	ZL39602-10A	ZL39602-10AW	35.64	39.60
11	ZL39603-11Y	39.60	44.76	11	ZL39602-11A	ZL39602-11AW	39.60	43.56
12	ZL39603-12Y	43.56	48.72	12	ZL39602-12A	ZL39602-12AW	43.56	47.52
13	ZL39603-13Y	47.52	52.68	13	ZL39602-13A	ZL39602-13AW	47.52	51.48
14	ZL39603-14Y	51.48	56.64	14	ZL39602-14A	ZL39602-14AW	51.48	55.44
15	ZL39603-15Y	55.44	60.60	15	ZL39602-15A	ZL39602-15AW	55.44	59.40