




ZL25401(2510)连接器 ZL25401(2510)Connector


间距 (pitch) : 2.54mm

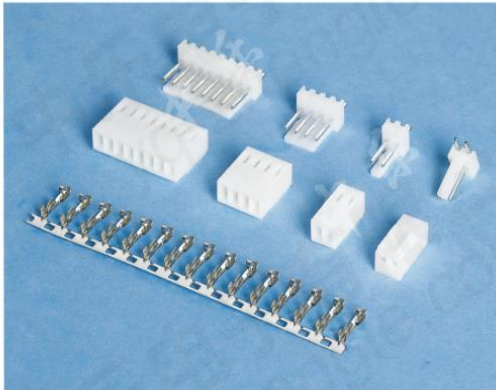


技术参数SPECIFICATIONS

- ◆极数 (Poles) : 2~20
- ◆适用线规 (Applicable wires): AWG28#~22#
- ◆额定电压 (Voltage rating): 250V.AC/DC
- ◆额定电流 (Current rating): 3A
- ◆接触电阻 (Contact resistance): $\leq 0.02\Omega$
- ◆绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- ◆耐压 (Withstand voltage): 1000V.AC/1分钟(Minute)
- ◆温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆材料 (Material):
 - 孔座 (Housing): 尼龙 (Nylon) UL94V-2(0)
 - 端子 (Terminal): 磷青铜 (Phosphor. Bronze Tin/plated)
 - 针座 (Wafer): 尼龙 (Nylon) UL94V-0
 - Pin针 (Pin): Phosphor. Bronze Tin/plated


ZL25401-Y(2510)



ZL25401-A(2510)




ZL25401-AW(2510)




型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins	数量 Quantity
	mm ²	AWG#	mm	
ZL25401-PT	0.08-0.33	28-22	1.0-1.8	10000PCS/盘

ZL25401-PT(2510)



ZL25401-AWG(2510)



线数 Poles	型号Type	尺寸Dimensions (mm)		线数 Poles	型号Type	尺寸Dimensions (mm)	
		A	B			A	B
2	ZL25401-2Y	2.54	5.80	2	ZL25401-2A	2.54	5.08
3	ZL25401-3Y	5.08	8.34	3	ZL25401-3A	2.54	7.62
4	ZL25401-4Y	7.62	10.88	4	ZL25401-4A	2.54	10.16
5	ZL25401-5Y	10.16	13.42	5	ZL25401-5A	2.54	12.70
6	ZL25401-6Y	12.70	15.96	6	ZL25401-6A	2.54	15.24
7	ZL25401-7Y	15.24	18.50	7	ZL25401-7A	2.54	17.78
8	ZL25401-8Y	17.78	21.04	8	ZL25401-8A	2.54	20.32
9	ZL25401-9Y	20.32	23.58	9	ZL25401-9A	2.54	22.86
10	ZL25401-10Y	22.86	26.12	10	ZL25401-10A	2.54	25.40
11	ZL25401-11Y	25.40	28.66	11	ZL25401-11A	2.54	27.94
12	ZL25401-12Y	27.94	31.20	12	ZL25401-12A	2.54	30.48
13	ZL25401-13Y	30.48	33.74	13	ZL25401-13A	2.54	33.02
14	ZL25401-14Y	33.02	36.28	14	ZL25401-14A	2.54	35.56
15	ZL25401-15Y	35.56	38.82	15	ZL25401-15A	2.54	38.10
16	ZL25401-16Y	38.10	41.36	16	ZL25401-16A	2.54	40.64