

### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



# FGL40N120AND 1200V NPT IGBT

### **Features**

· High speed switching

• Low saturation voltage :  $V_{CE(sat)} = 2.6 \text{ V} @ I_C = 40 \text{A}$ 

· High input impedance


• CO-PAK, IGBT with FRD :  $t_{rr} = 75$ ns (typ.)

### **Applications**

Induction Heating, UPS, AC & DC motor controls and general purpose inverters.

### **Description**

Employing NPT technology, Fairchild's AND series of IGBTs provides low conduction and switching losses. The AND series offers an solution for application such as induction heating (IH), motor control, general purpose inverters and uninterruptible power supplies (UPS).





### **Absolute Maximum Ratings**

Symbol	Parameter		FGL40N120AND	Units
V <sub>CES</sub>	Collector-Emitter Voltage		1200	V
$V_{GES}$	Gate-Emitter Voltage		±25	V
	Collector Current	@T <sub>C</sub> = 25°C	64	Α
IC	Collector Current	@T <sub>C</sub> = 100°C	40	Α
I <sub>CM(1)</sub>	Pulsed Collector Current		160	Α
I <sub>F</sub>	Diode Continuous Forward Current @T <sub>C</sub> = 100°C		40	Α
I <sub>FM</sub>	Diode Maximum Forward Current		240	Α
D	Maximum Power Dissipation	@T <sub>C</sub> = 25°C	500	W
$P_{D}$	Maximum Power Dissipation	@T <sub>C</sub> = 100°C	200	W
SCWT	Short Circuit Withstand Time, V <sub>CE</sub> = 600V, V <sub>GE</sub> = 15V, T <sub>C</sub> = 125°C		10	μs
TJ	Operating Junction Temperature		-55 to +150	°C
T <sub>STG</sub>	Storage Temperature Range		-55 to +150	°C
T <sub>L</sub>	Maximum Lead Temp. for Soldering Purposes, 1/8" from Case for 5 seconds		300	°C

#### Notes:

(1) Pulse width limited by max. junction temperature

### **Thermal Characteristics**

Symbol	Parameter	Тур.	Max.	Units
$R_{\theta JC}$ (IGBT)	Thermal Resistance, Junction-to-Case		0.25	°C/W
$R_{\theta JC}(DIODE)$	Thermal Resistance, Junction-to-Case		0.7	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient		25	°C/W

# **Package Marking and Ordering Information**

<b>Device Marking</b>	Device	Package	Reel Size	Tape Width	Quantity
FGL40N120AND	FGL40N120AND	TO-264	=	-	25

# Electrical Characteristics of the IGBT $T_C = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Units
Off Charact	eristics					
BV <sub>CES</sub>	Collector-Emitter Breakdown Voltage	$V_{GE} = 0V$ , $I_C = 1mA$	1200			V
BV <sub>CES</sub> / ΔT <sub>J</sub>	Temperature Coefficient of Breakdown Voltage	V <sub>GE</sub> = 0V, I <sub>C</sub> = 1mA		0.6		V/°C
I <sub>CES</sub>	Collector Cut-Off Current	$V_{CE} = V_{CES}, V_{GE} = 0V$			1	mA
I <sub>GES</sub>	G-E Leakage Current	$V_{GE} = V_{GES}, V_{CE} = 0V$			±250	nA
On Charact	eristics					
V <sub>GE(th)</sub>	G-E Threshold Voltage	$I_{C} = 250 \mu A, V_{CE} = V_{GE}$	3.5	5.5	7.5	V
- GE(III)		I <sub>C</sub> = 40A, V <sub>GE</sub> = 15V		2.6	3.2	V
V <sub>CE(sat)</sub>	Collector to Emitter Saturation Voltage	I <sub>C</sub> = 40A, V <sub>GE</sub> = 15V, T <sub>C</sub> = 125°C		2.9		V
		I <sub>C</sub> = 64A, V <sub>GE</sub> = 15V		3.15		V
Dynamic Cl	haracteristics			l .		1
C <sub>ies</sub>	Input Capacitance			3200		pF
C <sub>oes</sub>	Output Capacitance	$V_{CE} = 30V, V_{GE} = 0V$		370		pF
C <sub>res</sub>	Reverse Transfer Capacitance	f = 1MHz		125		pF
Switching (	Characteristics					
t <sub>d(on)</sub>	Turn-On Delay Time			15		ns
t <sub>r</sub>	Rise Time	]		20		ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{CC} = 600V, I_{C} = 40A,$		110		ns
t <sub>f</sub>	Fall Time	$R_G = 5\Omega, V_{GE} = 15V,$		40	80	ns
E <sub>on</sub>	Turn-On Switching Loss	Inductive Load, T <sub>C</sub> = 25°C		2.3	3.45	mJ
E <sub>off</sub>	Turn-Off Switching Loss			1.1	1.65	mJ
E <sub>ts</sub>	Total Switching Loss			3.4	5.1	mJ
t <sub>d(on)</sub>	Turn-On Delay Time			20		ns
t <sub>r</sub>	Rise Time			25		ns
t <sub>d(off)</sub>	Turn-Off Delay Time	$V_{CC} = 600V, I_{C} = 40A,$		120		ns
t <sub>f</sub>	Fall Time	$R_G = 5\Omega$ , $V_{GE} = 15V$ ,		45		ns
E <sub>on</sub>	Turn-On Switching Loss	Inductive Load, T <sub>C</sub> = 125°C		2.5		mJ
E <sub>off</sub>	Turn-Off Switching Loss			1.8		mJ
E <sub>ts</sub>	Total Switching Loss			4.3		mJ
Qg	Total Gate charge			220	330	nC
Q <sub>ge</sub>	Gate-Emitter Charge	$V_{CE} = 600V, I_{C} = 40A,$ $V_{GE} = 15V$		25	38	nC
Q <sub>gc</sub>	Gate-Collector Charge	1 *GE = 10 *		130	195	nC

# Electrical Characteristics of DIODE $T_C = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Test Conditions		Min.	Тур.	Max.	Units
V	Diode Forward Voltage	I <sub>F</sub> = 40A	T <sub>C</sub> = 25°C		3.2	4.0	V
$V_{FM}$			T <sub>C</sub> = 125°C		2.7		V
+	Diode Reverse Recovery Time		T <sub>C</sub> = 25°C		75	112	nS
t <sub>rr</sub>	Diode Reverse Recovery Time		T <sub>C</sub> = 125°C		130		113
	Diode Peak Reverse Recovery	I <sub>F</sub> = 40A,	T <sub>C</sub> = 25°C		8	12	Α
l rr	Current		T <sub>C</sub> = 125°C		13		_ ^
Q <sub>rr</sub>	Diode Reverse Recovery Charge		T <sub>C</sub> = 25°C		300	450	nC
			T <sub>C</sub> = 125°C		845		iiC

### **Typical Performance Characteristics**

**Figure 1. Typical Output Characteristics** 




Figure 3. Saturation Voltage vs. Case
Temperature at Variant Current Level




Figure 5. Saturation Voltage vs. V<sub>GE</sub>




Figure 2. Typical Saturation Voltage Characteristics




Figure 4. Load Current vs. Frequency





Figure 6. Saturation Voltage vs.  $V_{\text{GE}}$ 



### Typical Performance Characteristics (Continued)

Figure 7. Capacitance Characteristics




Figure 9. Turn-Off Characteristics vs. **Gate Resistance** 




Figure 11. Turn-On Characteristics vs. **Collector Current** 




Figure 8. Turn-On Characteristics vs. Gate Resistance




Figure 10. Switching Loss vs. Gate Resistance





Figure 12. Turn-Off Characteristics vs. **Collector Current** 



### Typical Performance Characteristics (Continued)

Figure 13. Switching Loss vs. Collector Current




Figure 15. SOA Characteristics




Figure 17. Forward Characteristics




Figure 14. Gate Charge Characteristics




Figure 16. Turn-Off SOA





Figure 18. Reverse Recovery Current



### Typical Performance Characteristics (Continued)

Figure 19. Stored Charge




Figure 20. Reverse Recovery Time







Figure 21. Transient Thermal Impedance of IGBT

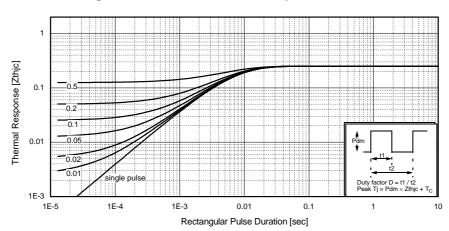

### **Mechanical Dimensions**

TO-264

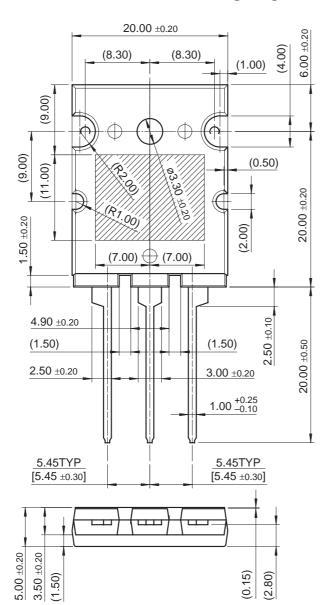

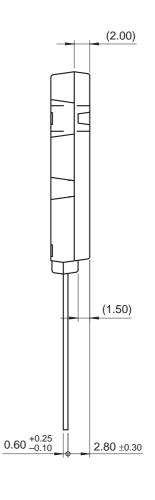

Dimensions in Millimeters





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidianries, and is not intended to be an exhaustive list of all such trademarks.

ACEx<sup>®</sup> FPS™ PDP-SPM™ SupreMOS™ Power220® FRFET® Build it Now™ SyncFET™ POWEREDGE® CorePLUS™ Global Power Resource<sup>SM</sup> SYSTEM ® CROSSVOLT™ Green FPS™ Power-SPM™ The Power Franchise®  $\mathsf{PowerTrench}^{\mathbb{R}}$ Green FPS™ e-Series™ **CTL™** p wer franchise GTO™ Programmable Active Droop™ Current Transfer Logic™ i-Lo™ EcoSPARK<sup>®</sup> QFET® TinyBoost™ EZSWITCH™ \* IntelliMAX™ QS™ TinyBuck™ ISOPLANAR™ QT Optoelectronics™ TinyLogic<sup>®</sup> MegaBuck™ Quiet Series™ TINYOPTO™ MICROCOUPLER™ RapidConfigure™ TinyPower™ airchild<sup>®</sup> MicroFET™ SMART START™ TinyPWM™ MicroPak™ Fairchild Semiconductor® SPM® TinyWire™ FACT Quiet Series™ MillerDrive™ STEALTH™ µSerDes™ FACT® Motion-SPM™ SuperFET™ UHC® FAST® OPTOLOGIC® SuperSOT™-3 Ultra FRFET™ OPTOPLANAR® SuperSOT™-6 FastvCore™ UniFET™ FlashWriter® \* SuperSOT™-8

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN: NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support, device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

 $VCX^{TM}$ 

### PRODUCT STATUS DEFINITIONS

### **Definition of Terms**

Datasheet Identification		Definition				
Advance Information Formative or In Design		This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.				
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.				
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.				
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.  Rev. I33				

<sup>\*</sup> EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

FGL40N120ANDTU